

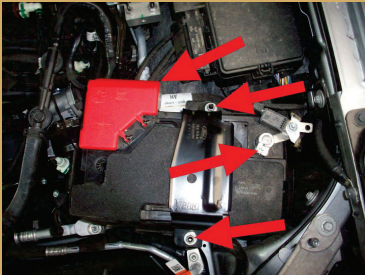
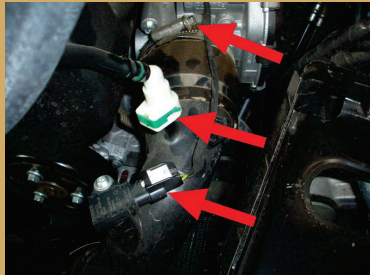
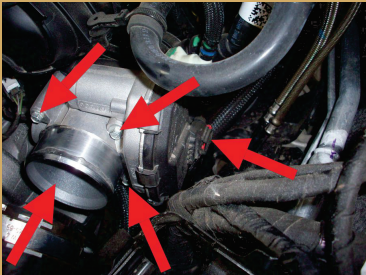




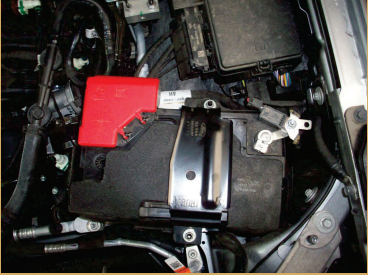
BRONCO

THROTTLE BODY SPACER

TOOLS REQUIRED

M7 socket wrench
M8 socket wrench
M10 socket wrench
M12 socket wrench
Flat screw driver

MATERIALS REQUIRED

<p>1</p>	<p>Remove the battery.</p>	<p>3</p>	<p>Disconnect the throttle body harness. Remove the throttle body.</p>
 <p>Photograph showing the battery being removed from the engine compartment. Red arrows point to the battery terminals and the battery cover.</p>	 <p>Photograph showing the wire harness and vent line being disconnected from the throttle body. Red arrows point to the connection points.</p>	 <p>Photograph showing the throttle body being disconnected from the intake manifold. Red arrows point to the throttle cable and the throttle body housing.</p>	 <p>Photograph showing a digital caliper measuring a screw to shorten it. The caliper displays 1.2200 inches. Two screws are shown next to it.</p>
<p>5</p>	<p>Secure the throttle body spacer to the intake manifold using the shortened screws.</p>	<p>7</p>	<p>Reinstall the charge pipe. Reconnect the wire harness and the vent line.</p>
 <p>Photograph showing the throttle body spacer being secured to the intake manifold with shortened screws. Red arrows point to the screws.</p>	 <p>Photograph showing the throttle body being installed on the spacer and the wire harness being reconnected. Red arrows point to the throttle body and the wire harness.</p>	 <p>Photograph showing the charge pipe being reinstalled and the wire harness and vent line being reconnected. Red arrows point to the charge pipe and the wire harness.</p>	 <p>Photograph showing the battery being reinstalled in the engine compartment. Red arrows point to the battery terminals and the battery cover.</p>