

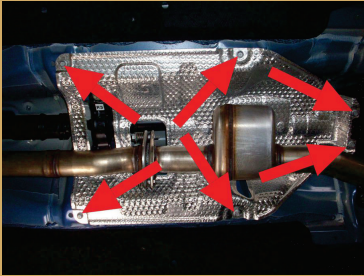
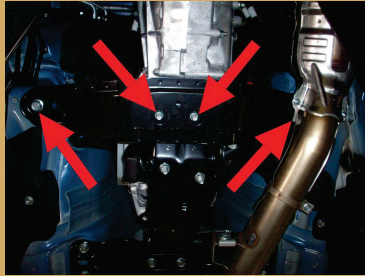
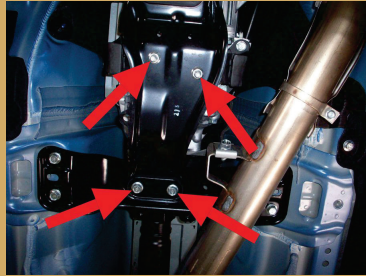
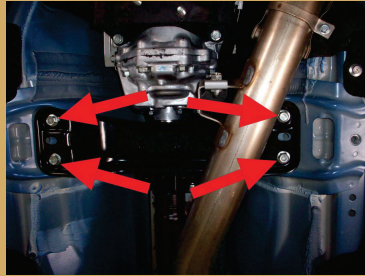
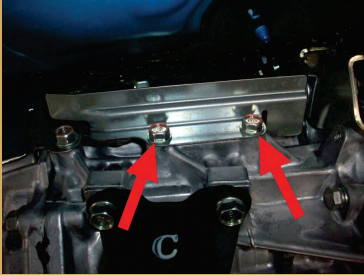
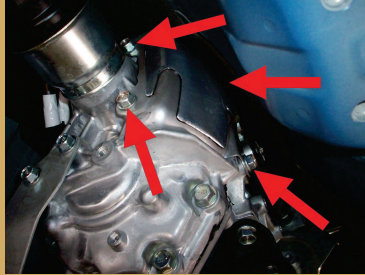
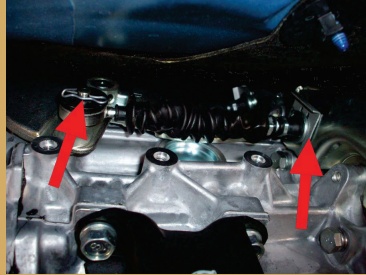

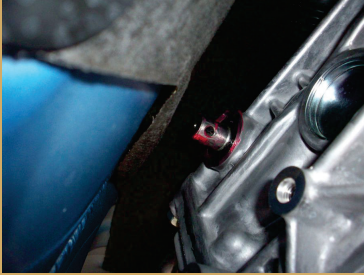


SUBARU WRX 22+ SHIFTER PLATE

TOOLS REQUIRED

M12, M14, M17 sockets
M12 box wrench
Flat screw driver
Pliers
3/16 (5mm) punch
Hammer

MATERIALS REQUIRED

Mobil 1 synthetic grease

<p>1</p>	<p>Remove the heat shield.</p>	<p>2</p>	<p>Remove the transmission support.</p>
			
<p>5</p>	<p>Remove the shifter plate guard.</p>	<p>6</p>	<p>Remove the shifter plate cover.</p>
		<p>7</p> <p>Remove the safety pin. Remove the shifter cable clip. Disconnect the shifter cable.</p> <p>For shifter bushing installation only go to the step 12.</p> 	<p>8</p> <p>Punch out the roll pin and remove the shifter plate.</p> 
<p>9</p>	<p>Grease the shifter shaft.</p>	<p>10</p>	<p>Pre insert roll pin into the Boomba Racing shifter plate. Make sure pin does not interfere with the center hole.</p>
		<p>11</p> <p>Install the Boomba Racing shifter plate. Punch in the roll pin. Install the supplied washer on the shifter pin. Grease the shifter pin.</p> 	<p>12</p> <p>Prepare the Boomba Racing shift bushings for installation. Grease the bushings.</p> 

13	Remove the OEM bushing from the shifter cable.	14	Install the shifter bushing.	15	Install the shifter cable and secure it with the safety pin. Secure the cable to the bracket with the clip.	16	Install the shifter plate guard.
17	Install the transmission supports.	18	Install the heat shield.				

